

UE-T Series

Upower

UE-48LI50T

Telecommunications Battery Series

48V 50Ah

SAFETY

- Long life type prismatic LiFePO4 cells, suitable for energy storage application.
- Low voltage system, safety for application.
- Battery certification: UN38.3, MSDS, CE.
- Cycle life > 6000 cycles.



DESIGN

- Standard 19" rack design, flexible and easy installation.
- -20~+55°C widely temperature range.
- Parallel support for more energy or more capacity inverter.
- SOC, RUN, ALARM display and BMS PC software.
- OVP, LVP, OCP, OTP, LTP, Short circuit protection.
- RS485, CAN communication port.
- Independent protection for charge and discharge.
- High reliability: AFE microchip is Panasonic & MCU is ST.
- Optional part: Bluetooth module, Heater.
- Optional: standard screw type connectors or plug and play Anphenol type connectors.

COMPATIBLE WITH INVERTER BRANDS

Communication compatible with major inverter.

UE-T Series

UE-48LI50T

Telecommunications Battery Series
48V 50Ah

MODEL PARAMETERS

Nominal Voltage	48V
Nominal Capacity	50Ah
Total Energy	2400Wh
Dimension (W*D*H, mm)	442*400*130.5
Weight	26.5Kg
Max. Charging Current	50A
Max. Discharging Current	50A
Pulse Discharge Current	55A @ 10min 60A @ 10s
Charging Voltage	51.8V~54.7V
End of Discharge Voltage	42V (Backup Application) / 45V (Cycle Application)
Operation Humidity	0~95% RH (No Condensing)
Operation Temperature Range	Charge: 0~+55°C; Discharge: -20 ~ +55°C
Cycle Life	>6000
Designed Calendar Life	10 Years
Communication Interface	RS485*2, CAN*1, Dry Contact*2
Protection	Over Voltage, Low Voltage, Over Current, Over Temperature, Low Temperature, Short Circuit
Parallel Support	Yes, Max. 15 Sets
Series Support	Not Support
IP Class	IP20
Certification	UN38.3, MSDS, CE

Note:

1.- Normally the Li-ion battery operation temperature range is: discharge -20~+55°C, charge 0~+55°C, if the optional heater is stalled, it will automatic start to work once the cell temperature is below 5°C and the heater can help to increas cell temperature 4~8°C/hour. With Optional Heater: Charge / Discharge: ~30 ~ +55°C.

2.- 4000 cycles at 25°C, 0.5C/0.5C, 100%DOD and 80% EOL. 6000 cycles at 25°C, 0.5C/0.5C, 80%DOD and 80% EOL.

3.- For parallel power cable conection, refer to user manual.

4.- Some models cell have UL, IEC certification.

UE-T Series


U^{power}

UE-48LI50T

Telecommunications Battery Series

48V 50Ah

SYSTEM TOPOLOGY

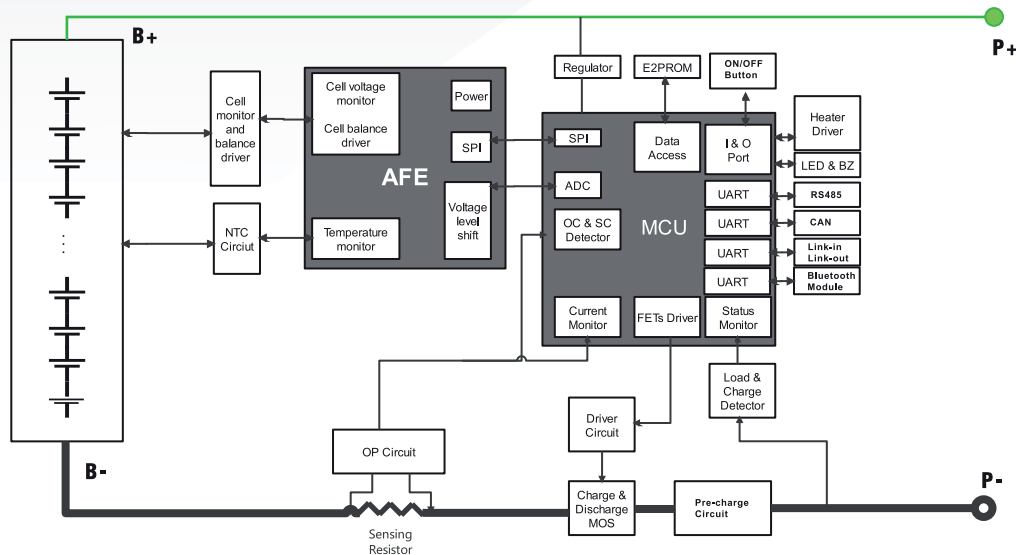

INTERNAL STRUCTURE DIAGRAM



*The connectors used in the picture do not have to match the real ones, as they are selectable.

UE-T Series


UE-48LI50T

Telecommunications Battery Series
48V 50Ah


U^{power}

PERFORMANCE CURVE


Different Discharge Rate and Temperature Characteristic

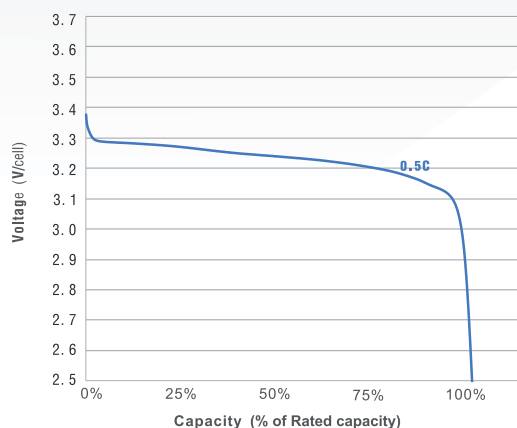


Different Charge Rate and Temperature Characteristic

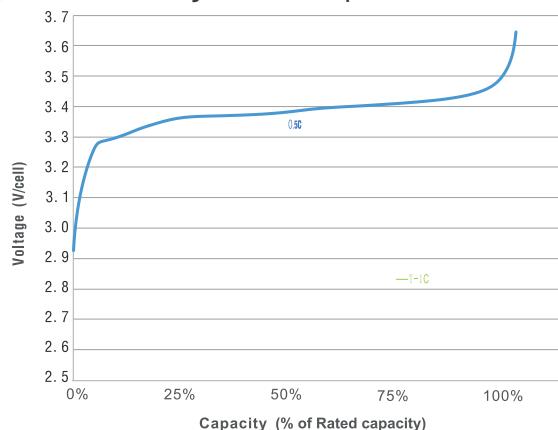


Different Temperature Self Discharge Curve

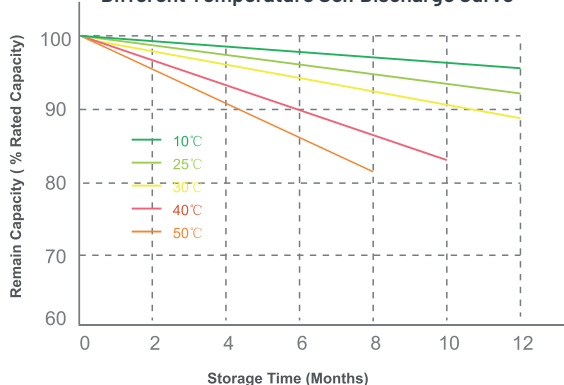


Capacity with Different Temperature

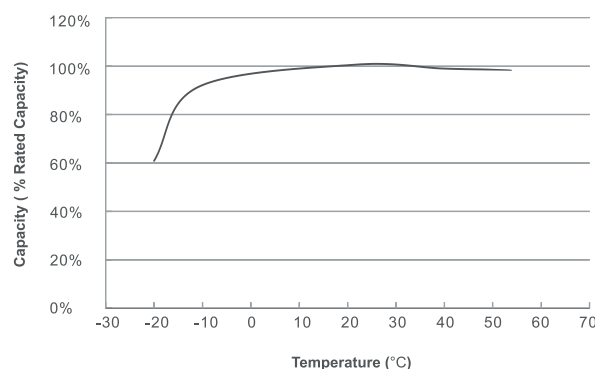

Typical Recharge Time

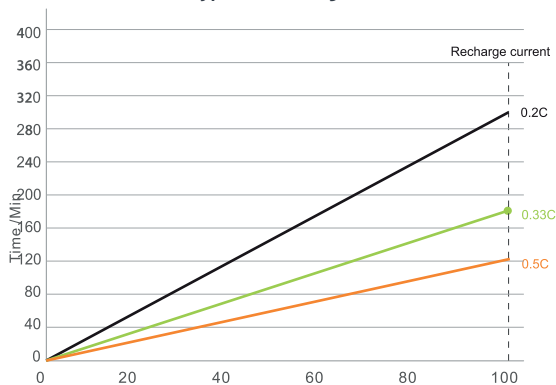

Typical Cycle Life

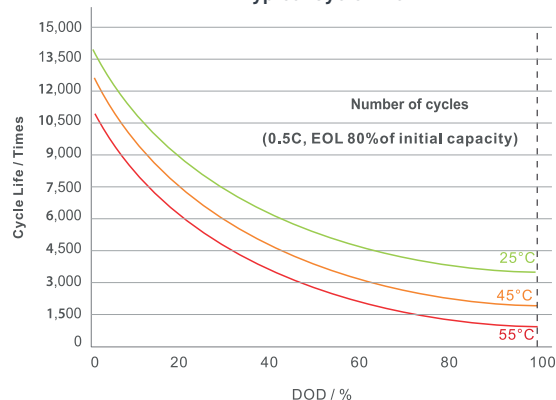

UE-T Series

Upower

UE-48LI50T


Telecommunications Battery Series

48V 50Ah

FRONT PANEL



OPTIONAL PARTS: BLUETOOTH MODULE & APP

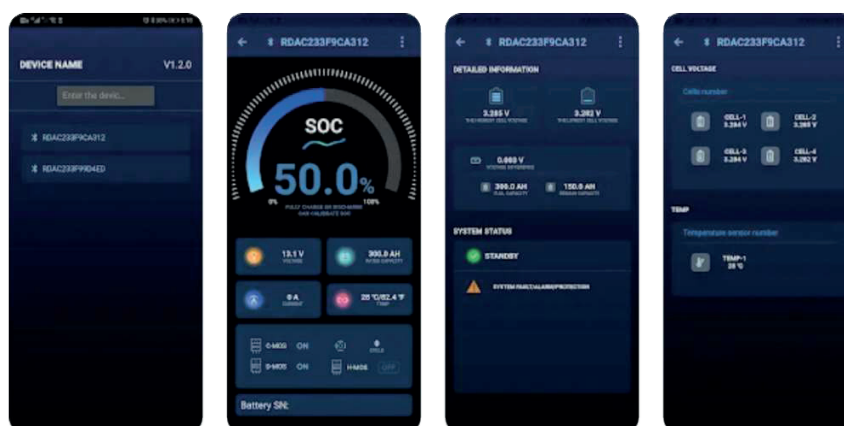

UE-T Series

UE-48LI50T

Telecommunications Battery Series
48V 50Ah

U^{power}

DIMENSION

