

SERIE UP

UP-12FN110

U^{power}



ELECTRICAL SPECIFICATIONS

Nominal Voltage	12V
Capacity	110Ah
Temperature	Discharge current 330A
Plus 25°C	420 secs till Uend -6V
Minus 30°C	120 secs till Uend -6V
Temperature	from -30°C to + 70°C

RESERVE CAPACITY

25A until 10.5V	20°C
Duration	200 min

Battery weight dry charged	19.05 kg
Electrolite weight	10.55 kg
Battery weight with electrolyte	29.60kg

BOX AND LID


PP Material	
-------------	--

SERIE UP

UP-12FN110

U^{power}

DRAWINGS

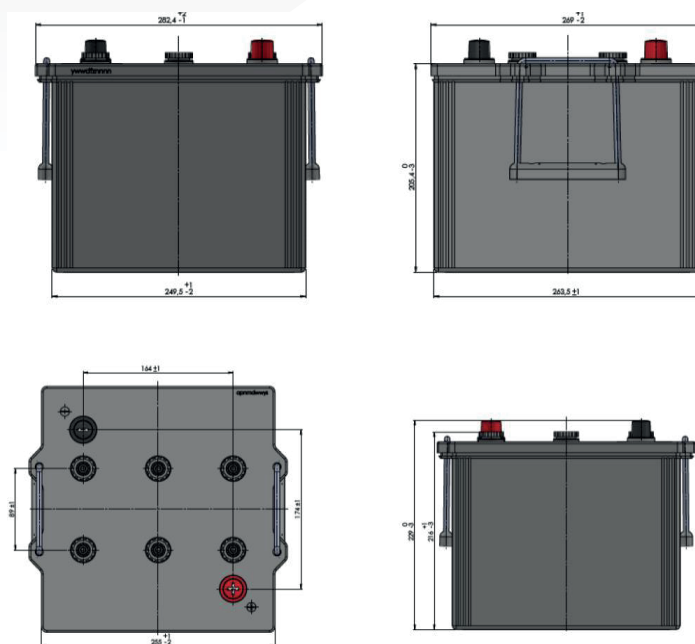

PHYSICAL CHARACTERISTICS

	SI Units	US Units
Lenght Max	286 mm	11.14 inches
Length Box	250 mm	9.84 inches
Weight Max	269 mm	10.59 inches
Weight Box	264 mm	10.39 inches
Height with terminals	229 mm	9.02 inches
Height Box	216 mm	8.50 inches

MANUFACTURE STANDARDS

ISO 9001, ISO 14001, OHSAS 18001, AQAP 2110, IATF 16949