

### UP-GS145



#### Product design features

- Maintenance free product (SMF)
- Power Supply & Starting power suitable
- More than 300 cycles at 75% D.O.D.
- More than 800 cycles IEC 61427
- High resistance to deep and repetitive discharge cycles
- Internal gas recombination efficiency 98% - 99%
- One-way valve regulated system with flame-arrestor
- Delivered ready for use at 100% of its nominal capacity
- Long Service Life


#### Mechanical Characteristics

	SI Units	US Unit
Length	330 mm	11.9 inches
Width	175 mm	6.8 inches
Height	240 mm	8.6 inches
Approx. Weight	27 kg	


#### Electrical Characteristics

Nominal voltage	12 Volts
Nominal Capacity (20H)	120 Ah
Nominal Capacity (100H)	145 Ah

#### Battery Layout

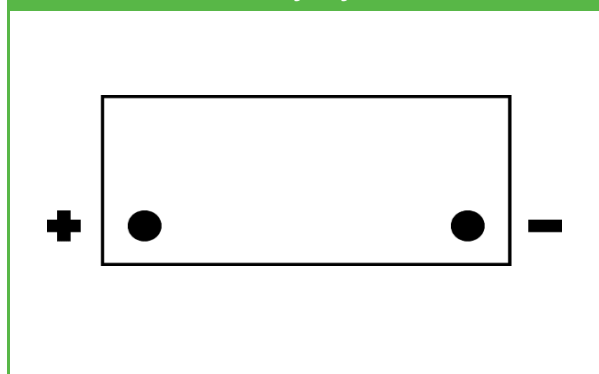

#### Capacity vs. Operating Temperature

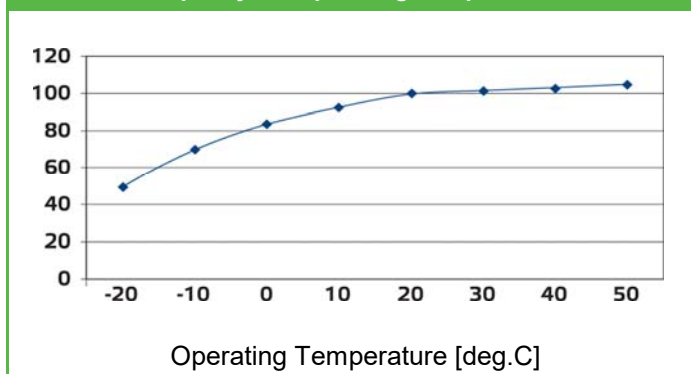

#### Other Specifications

Terminals	DUAL
Handles	Yes (2)
QTY/PLT/Layer	18/1/3

