

UP-PLH400-12



Specification	
Nominal Voltage	12V
Nominal Capacity (10HR)	100.0AH
Dimension	Length 341.5±3mm (13.44 inches)
	Width 175±2mm (6.89 inches)
	Container Height 213±2mm (8.39 inches)
	Total Height (with Terminal) 215±2mm (8.46 inches)
Approx Weight	Approx 29.8Kg (65.7 lbs)
Terminal	T11
Container Material	ABS
Rated Capacity	100.0AH/10.0A (10hr, 1.80V/cell, 25°C/77°F)
Power (Watts)	400Watts/cell (15min, 1.67V/cell, 25°C/77°F)
Max. Discharge Current	1250A (5s)
Internal Resistance	Approx 3.5mΩ
Operating Temperature Range	Discharge: -40~65°C (-40~149°F)
	Change : 0~40°C (32~104°F)
	Storage : -20~40°C (-4~104°F)
Nominal Operating Temperature Range	25±3°C (77±5°F)
Capacity affected by Temperature	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	Batteries can be stored up to 24 months at 25°C (77°F) and then a freshening charge is required.




Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	265.8	204.4	168.8	145.0	113.1	83.47	64.95	35.66	25.62	20.34	17.12	11.85	9.74	5.08
1.80V/cell	307.2	228.0	185.5	155.4	117.8	86.57	67.32	36.62	26.30	20.91	17.53	12.11	10.00	5.20
1.75V/cell	332.9	241.8	194.0	162.0	121.6	88.93	69.19	37.59	26.87	21.39	17.88	12.31	10.14	5.27
1.70V/cell	347.7	254.6	202.1	167.0	125.1	90.83	70.51	38.42	27.45	21.82	18.29	12.47	10.27	5.32
1.67V/cell	384.0	276.0	218.7	176.7	128.4	92.24	71.63	39.12	27.94	22.20	18.58	12.63	10.38	5.36
1.60V/cell	418.8	296.4	227.2	182.7	132.0	94.01	72.88	39.88	28.47	22.57	18.87	12.78	10.48	5.39

Constant Power Discharge (Watts/cell) at 25°C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	499.4	387.7	323.0	278.9	220.2	164.9	128.8	71.27	51.40	40.91	34.53	24.01	19.81	10.37
1.80V/cell	567.1	425.7	350.1	296.0	227.8	170.1	132.8	72.83	52.57	41.93	35.24	24.46	20.26	10.58
1.75V/cell	605.5	446.8	362.7	306.1	233.3	173.5	135.6	74.38	53.43	42.70	35.82	24.78	20.49	10.70
1.70V/cell	623.4	463.4	373.4	312.4	238.1	176.1	137.5	75.64	54.34	43.42	36.53	25.05	20.69	10.77
1.67V/cell	678.9	497.4	400.0	328.0	243.2	178.1	139.0	76.74	55.12	44.05	37.01	25.32	20.86	10.85
1.60V/cell	719.1	519.9	406.8	333.4	246.9	179.5	140.2	77.60	55.76	44.55	37.39	25.51	21.00	10.89

Dimensions

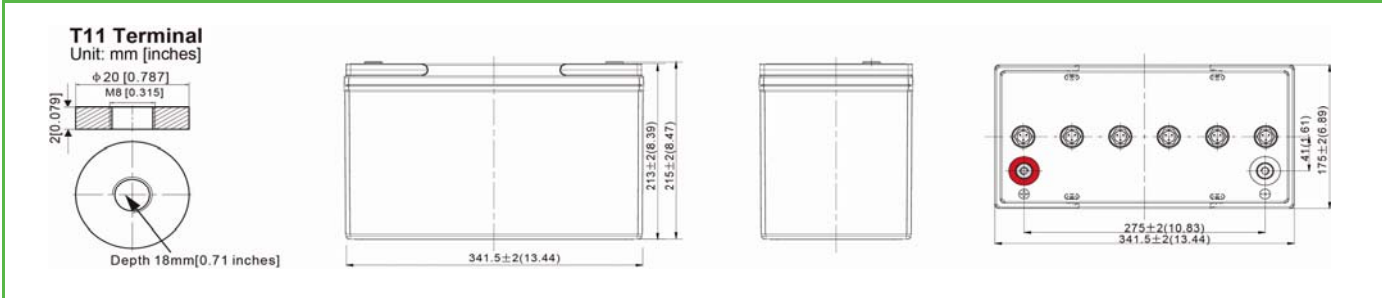


UP-PLH400-12


Effect of Temperature on Discharge Time

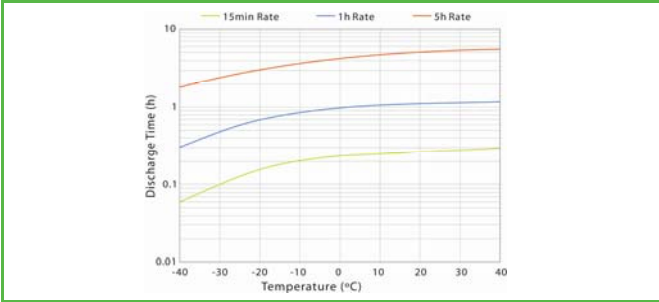


Self Discharge Characteristics

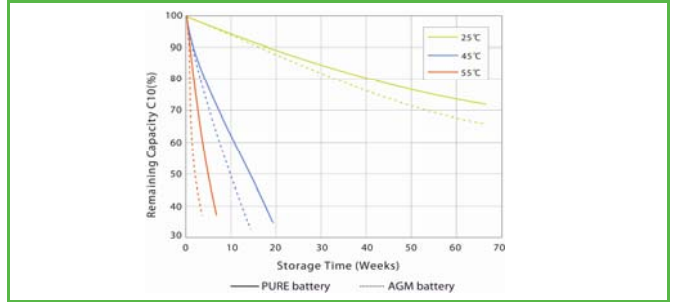


Float Current vs Float Time

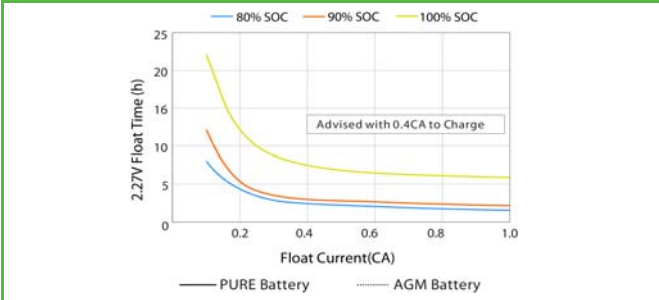


Voltage Profiles @25°C Constant Current Charging

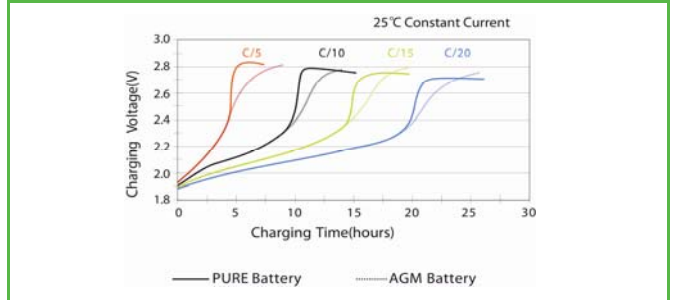


Quick Charge / Float Charge

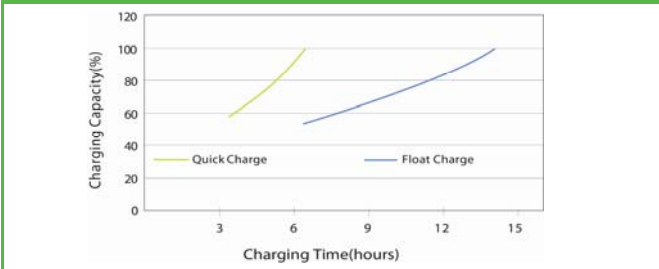


Charge Time vs The Depth of Discharge

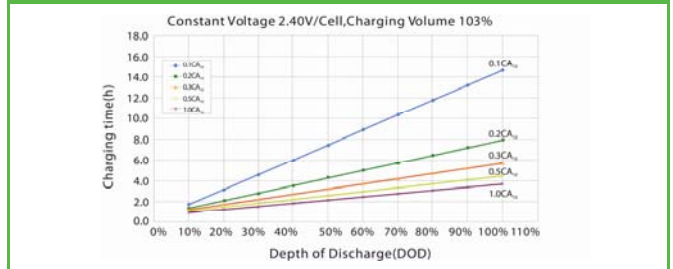

Float Charging Characteristics

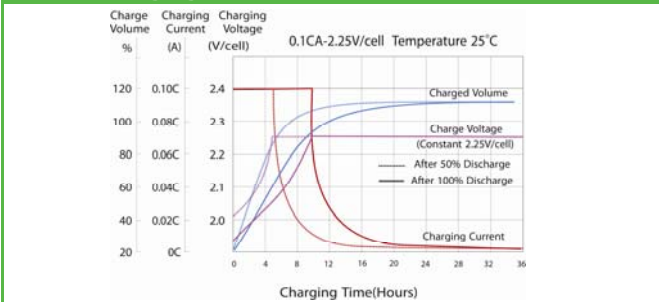

Effect of Temperature on Long Term Float Life

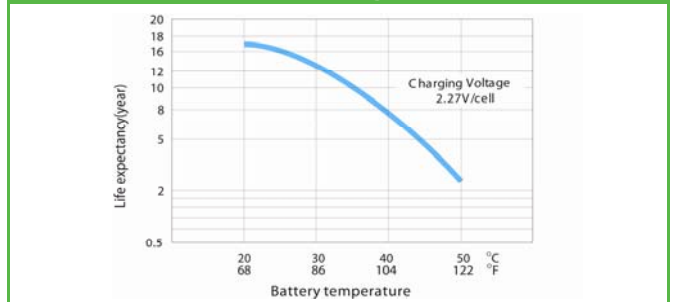

Charge Voltage Compensation

