


## UP-ST2000-2



Specification		
Nominal Voltage	2V	
Nominal Capacity (10HR)	2000.0AH	
Dimension	Length	490±3mm (19.29 inches)
	Width	350±3mm (13.78 inches)
	Container Height	339±3mm (13.35 inches)
	Total Height (with Terminal)	349±3mm (13.74 inches)
	Approx Weight	Approx 119.0Kg (262.4lbs)
Terminal	T11	
Container Material	ABS	
Rated Capacity	2100.0AH/105.0A	(20hr, 1.80V/cell, 25°C/77°F)
	2000.0AH/200.0A	(10hr, 1.80V/cell, 25°C/77°F)
	1740.0AH/348.0A	(5hr, 1.75V/cell, 25°C/77°F)
	1512.0AH/504.0A	(3hr, 1.75V/cell, 25°C/77°F)
	1214.0AH/1214.0A	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	16000A (5s)	
Internal Resistance	Approx 0.28mΩ	
Operating Temperature Range	Discharge:	-15~50°C (5~122°F)
	Charge :	0~40°C (32~104°F)
	Storage :	-15~40°C (5~104°F)
Nominal Operating Temperature Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 600.0A.Voltage. 2.4V~2.5.0V at 25°C (77°F) Temp. Coefficient -5mV/°C	
Standby Use	No limit on Initial Charging Current Voltage. 2.25V~2.3V at 25°C (77°F) Temp. Coefficient -3mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	Batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required.	

Constant Current Discharge (Amperes) at 25°C (77°F)											
F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1533.6	1216.0	998.0	599.5	463.3	380.5	324.0	283.0	228.0	191.0	101.3
1.80V/cell	1645.5	1279.3	1060.0	632.4	486.0	397.5	337.6	295.7	236.8	200.0	105.0
1.75V/cell	1742.5	1345.2	1106.0	658.6	504.0	411.0	348.0	302.7	241.3	202.0	106.1
1.70V/cell	1828.4	1395.9	1144.7	678.0	517.3	420.0	354.0	308.0	245.0	204.0	107.1
1.65V/cell	1917.9	1456.7	1186.0	698.4	528.7	429.0	361.6	313.3	248.5	206.6	108.5
1.60V/cell	/	1496.0	1214.0	715.0	540.0	435.0	366.8	317.7	251.8	209.0	109.7





Constant Power Discharge (Watts) at 25°C (77°F)											
F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2930.8	2338.0	1930.4	1166.0	905.5	746.3	638.3	559.2	452.4	379.9	201.7
1.80V/cell	3119.4	2443.5	2038.9	1224.3	945.3	777.0	662.1	581.9	468.4	397.2	208.7
1.75V/cell	3278.2	2554.3	2118.0	1269.9	977.8	800.6	680.2	593.8	476.2	400.7	210.6
1.70V/cell	3410.8	2632.0	2180.6	1301.8	999.9	814.8	689.9	603.4	483.1	404.4	212.5
1.65V/cell	3551.2	2731.3	2246.4	1335.3	1017.3	829.5	702.2	611.9	488.8	408.9	215.0
1.60V/cell	/	2778.8	2283.5	1358.5	1033.7	837.4	709.5	618.5	494.2	412.9	217.1




**UP-ST2000-2**

**Dimensions**


■ T11 Terminal  
Unit: mm [inches]




**Discharge Characteristics**

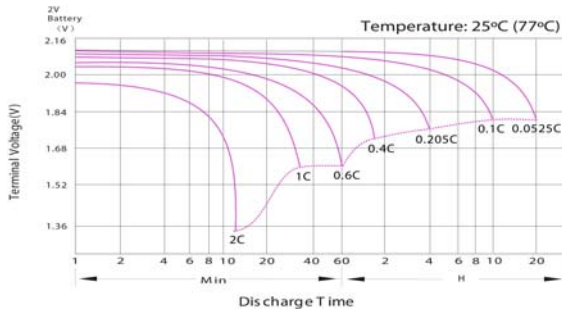


**Effect of Temperature on Long Term Float Life**

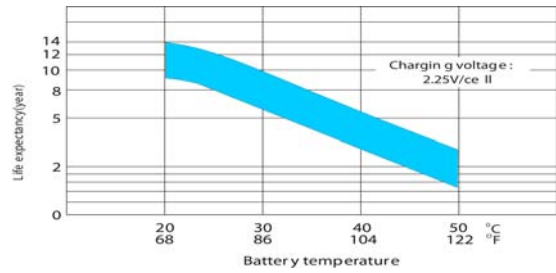


**Float Charging Characteristics**

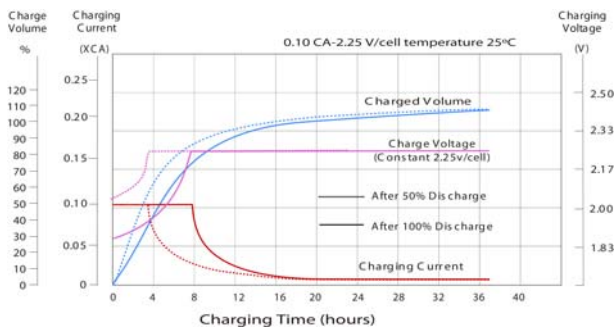


**Cycle Life in Relation to Depth of Discharge**

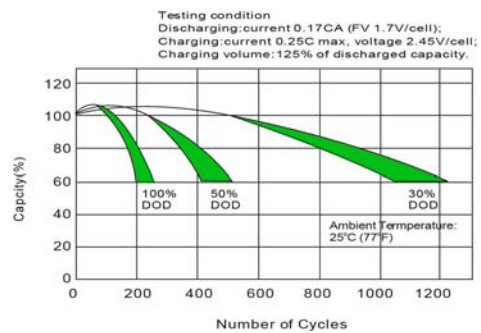

**Temperature Effects in Relation to Battery Capacity**

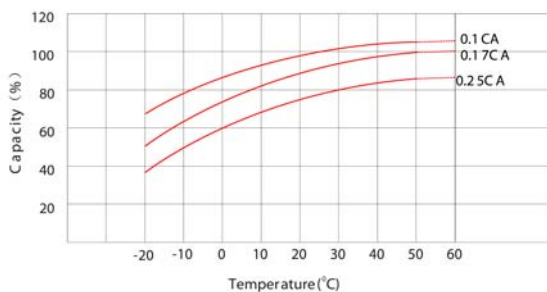

**Self Discharge Characteristics**

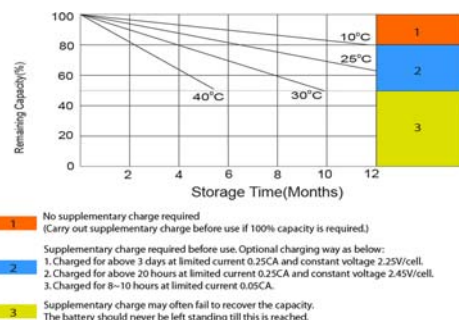

Poligono industrial La Dehesa  
C/ Dehesa Vieja, nº2 Nave 16  
28052 Madrid (Spain)  
Tel. (+34) 918 021 649  
Fax. (+34) 917 750 542  
info@masterbattery.es

